



INFRASTRUCTURE COMMITTEE MEETING

AGENDA

15 APRIL 2025

Your attendance is required at an Infrastructure Committee meeting of Council to be held in the Council Chambers, 232 Bolsover Street, Rockhampton on 15 April 2025 commencing at 9:00 AM for transaction of the enclosed business.

A handwritten signature in black ink that reads "R Chessman".

ACTING CHIEF EXECUTIVE OFFICER
9 April 2025

Next Meeting Date: 20.05.25

Please note:

In accordance with the *Local Government Regulation 2012*, please be advised that all discussion held during the meeting is recorded for the purpose of verifying the minutes. This will include any discussion involving a Councillor, staff member or a member of the public.

TABLE OF CONTENTS

ITEM	SUBJECT	PAGE NO
1	OPENING.....	1
2	PRESENT	1
3	APOLOGIES AND LEAVE OF ABSENCE	1
4	CONFIRMATION OF MINUTES.....	1
5	DECLARATIONS OF INTEREST IN MATTERS ON THE AGENDA	1
6	BUSINESS OUTSTANDING	2
	NIL	2
7	PUBLIC FORUMS/DEPUTATIONS	2
	NIL	2
8	PRESENTATION OF PETITIONS.....	2
	NIL	2
9	COMMITTEE REPORTS.....	2
	NIL	2
10	COUNCILLOR/DELEGATE REPORTS	3
	10.1 PORTFOLIO UPDATE.....	3
11	OFFICERS' REPORTS	4
	11.1 MONTHLY PROJECT STATUS REPORT FOR CIVIL OPERATIONS - FEBRUARY 2025	4
12	NOTICES OF MOTION	12
	NIL	12
13	QUESTIONS ON NOTICE	12
	NIL	12
14	URGENT BUSINESS/QUESTIONS	12
15	CLOSURE OF MEETING.....	12

1 OPENING

- 1.1 Acknowledgement of Country

2 PRESENT

Members Present:

The Mayor, Councillor A P Williams (Chairperson)
Deputy Mayor, Councillor M D Wickerson
Councillor S Latcham
Councillor E W Oram
Councillor C R Rutherford
Councillor M A Taylor
Councillor G D Mathers
Councillor E B Hilse

In Attendance:

Mr R Cheesman – Deputy Chief Executive Officer

3 APOLOGIES AND LEAVE OF ABSENCE

4 CONFIRMATION OF MINUTES

Minutes of the Infrastructure Committee held 18 March 2025

5 DECLARATIONS OF INTEREST IN MATTERS ON THE AGENDA

6 BUSINESS OUTSTANDING

Nil

7 PUBLIC FORUMS/DEPUTATIONS

Nil

8 PRESENTATION OF PETITIONS

Nil

9 COMMITTEE REPORTS

Nil

10 COUNCILLOR/DELEGATE REPORTS

10.1 PORTFOLIO UPDATE

File No: 10097
Attachments: Nil
Authorising Officer: Peter Kofod - General Manager Regional Services
Author: Peter Kofod - General Manager Regional Services

SUMMARY

Portfolio Councillors for Waste and Recycling, Water and Infrastructure will provide an update on matters of interest within their portfolio.

OFFICER'S RECOMMENDATION

THAT the Portfolio Updates for Waste and Recycling, Water and Infrastructure be received.

BACKGROUND

Councillors have requested an opportunity to speak about their relevant Portfolio during Committee Meetings.

The following Councillors will provide an update on their Portfolio at Infrastructure Committee:

- Councillor Shane Latcham – Waste and Recycling Portfolio
- Councillor Edward Oram – Water Portfolio
- Councillor Marika Taylor – Infrastructure Portfolio

11 OFFICERS' REPORTS

11.1 MONTHLY PROJECT STATUS REPORT FOR CIVIL OPERATIONS - FEBRUARY 2025

File No: 7028

Attachments: 1. **Monthly Project Status Report - February 2025**[↓](#)

Authorising Officer: Peter Kofod - General Manager Regional Services

Author: John Gwydir - Manager Civil Operations

SUMMARY

Monthly Project Status Report on all major capital projects being delivered by the Civil Operations section.

OFFICER'S RECOMMENDATION

THAT the Monthly Project Status Report for Civil Operations for February 2025 be received.

COMMENTARY

The Civil Operations section submits a monthly project status report outlining the status, key milestones and deliverables of major capital projects managed by the Unit.

The following projects are reported on for the month of February 2025:

- Unsealed Road Network;
- 2024/2025 Capital Works Program;
- Derby Street / Denison Street / Kent Street
- Denison Street Reconstruction
- Glenmore State School

MONTHLY PROJECT STATUS REPORT FOR CIVIL OPERATIONS FEBRUARY 2025

Monthly Project Status Report - February 2025

Meeting Date: 15 April 2025

Attachment No: 1

CIVIL OPERATIONS

Monthly Project Report – February 2025



UNSEALED ROAD NETWORK

During the month of February 2025, approximately 45.80 kms of roads were graded and a further 4.27 kms of roads re-sheeted with approximately 100mm of gravel to improve wet weather trafficability.

Completed – February 2025

Road Name	Area	Total Length Graded (km)	Total Length Re-sheeted (km)
Boys Road	Alton Downs	1.51 kms	
Reid Road	Alton Downs	3.84 kms	
Gum Tree Road	Alton Downs	1.14 kms	
McCamley Road	Bajool	1.22 kms	0.40 kms
Creed Road	Bajool	2.40 kms	0.50 kms
Kirk Road	Bajool	2.43 kms	1.32 kms
Riverslea Road	Gogango	5.77 kms	2.05 kms
Boulder Creek Road	Mt Morgan	14.0 kms	
McArthur Street	Mt Morgan	1.20 kms	
Rosewood Road	Wycarbah	12.29 kms	

In Progress – March 2025

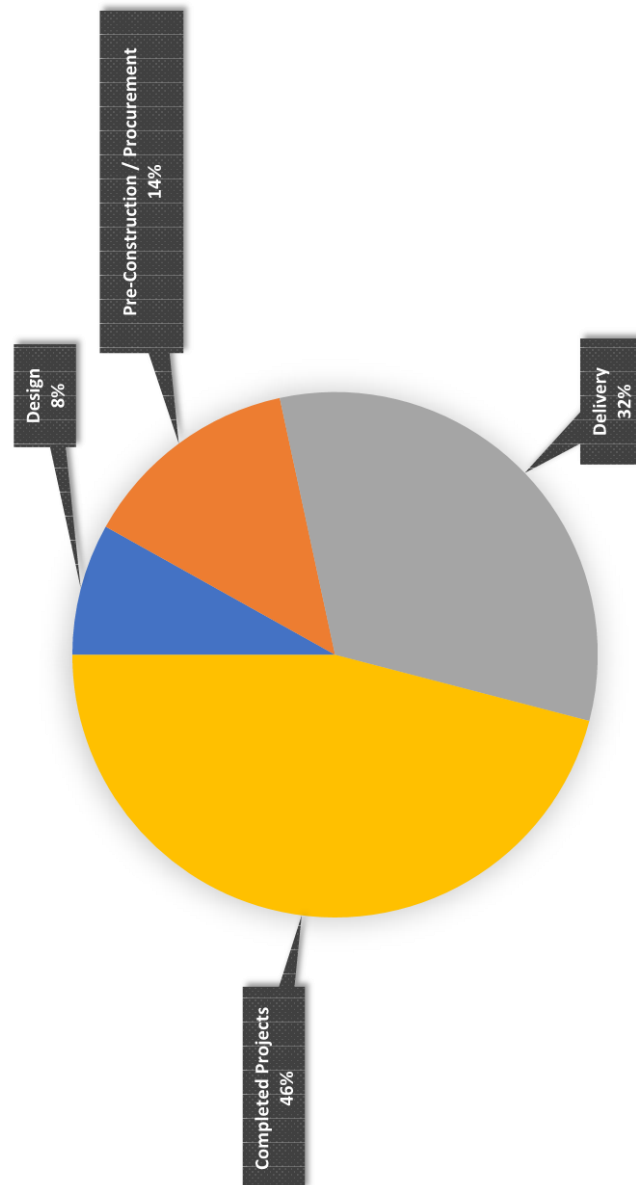
<ul style="list-style-type: none"> • Del Rosa Road, Alton Downs • Punter Road, Bajool • Old Coach Road, Bajool • Riverslea Road, Gogango • Rookwood Road, Gogango • Smalls Road, Hamilton Creek • Cooks Road, Hamilton Creek • Golflinks Road, Hamilton Creek 	<ul style="list-style-type: none"> • Iker Road, Kalapa • Kalapa Back Road, Kalapa • Glenroy Road, Morinish • Fernvale Road, Nine Mile Creek • Calmorin Road, Ridgeland • Birralea Road, South Yaamba • Rosewood Road, Wycarbah
---	---

Areas Programmed for April 2025

<ul style="list-style-type: none"> • Bajool • Gogango • Marmor • Morinish 	<ul style="list-style-type: none"> • Nine Mile • Ridgeland • South Yaamba
---	--

CAPITAL WORKS PROGRAM

Summary (by project status)

2024-25 Capital Works Program - Civil Operations


Design			
2024-2025 Projects			
Glenroy Road – Fitzroy River Bridge			Underway
Glenroy Road - Upgrades			Underway
Rodboro Street - Traffic Calming Scheme and Footpath (Black Spot Funding)			Underway
Pre-Construction / Procurement			
2024-2025 Projects			
Broadway Street (O'Connell Street to Quay Street)		Estimated Start Date	Comment
		April 2025	
Parkhurst Industrial Area – Stage 3 - Johnson Street Rehabilitation (SLRIP / REFF Funding)		April 2025	
Dale Park - Access Road		May 2025	
South Yaamba Road – Reconstruction (SLRIP Funding)		May 2025	
2024/2025 Annual Reseal Program – Micro-Surfacing (Slurry Seals)		July 2025	Tender Awarded – Contractor not available until July 2025
Delivery			
2024-2025 Projects			
Rockhampton State High School – Footpath (STIP Funding – Tranche 5)	Actual Start Date	Estimated Completion Date	Comment
	February 2025	March 2025	
2024/2025 Annual Reseal Program – Spray Seals	March 2025	April 2025	
Cambridge Street (Lennox Street to Murray Lane) - Footpath (LRCI Phase 4 Funding)	September 2024	April 2025	
Lion Mountain Road, Alton Downs (Ch 9.2 to 11.2) - Sealing	December 2024	April 2025	
Waraburra State School – Parking and Pedestrian Safety Works (STIP Funding – Tranche 5)	December 2024	April 2025	
Bills Road, Marmor (Ch 0.23 to Ch1.33) - Sealing (LRCI Phase 4 Funding)	March 2025	May 2025	

Norman Road (German Street to Dodson Street) - Footpath (LRCI Phase 4 Funding)	March 2025	May 2025	
Parkhurst Industrial Area – Stage 2 – Wade Street Rehabilitation (SLRIP / REFF Funding)	August 2024	May 2025	
Alexandra Street / Birkbeck Drive Intersection – Early Works	December 2024	June 2025	
Bus Stop and Bus Shelter Program	March 2025	June 2025	
Murray Street (Fitzroy Street to Denham Street) - Rehabilitation	March 2025	June 2025	
Unsealed Road Gravel Program	July 2024	June 2025	Refer to Unsealed Road Network Update
Completed			
Parkhurst Industrial Area – Stage 1 – McLaughlin Street (HVSPF Funding)			
Stanwell-Waroula Road - Sealing (RRUPP Funding)			
Upper Dawson Road / Canning Street / Derby Street – Intersection Upgrades – (Black Spot Funding)			
Somerset Road – Road and Stormwater Upgrades (TIDS Funding)			
St Mary's Catholic Primary School – Footpath (STIP Funding – Tranche 5)			
Denham Street (Canning Street to George Street) – Intersection Upgrades – (Black Spot Funding)			
Dale Park - Asphalt Basin Stormwater Quality Device			
Murphy Road, Kabra (Ch 0.44 to Ch 1.5) - Sealing (LRCI Phase 4 Funding)			
St Paul's Catholic Primary School – Footpath (STIP Funding – Tranche 6)			
Bawden Street / Bedford Street - Intersection Upgrade			
Berkerker State School – Footpath (STIP Funding – Tranche 5)			
Emmaus College – Footpath (STIP Funding – Tranche 6)			

MAJOR PROJECTS UPDATE

Derby Street / Denison Street / Kent Street

Total Adopted Budget: \$2,200,000

Scope	The works being undertaken include installing a single-lane roundabout, traffic calming solutions, raised safety platforms, improved intersection signage and improved roadway lighting. <i>Actual Start Date: February 2024</i> <i>Estimated Completion Date: April 2025</i>			
Initial Construction Estimate	\$2,190,000	Estimated Cost at Completion	\$2,200,000	Budget Health 

On the Horizon – Key Milestones & Deliverables

March

- Completion kerb, island and safety platform work at the intersection of Derby and Denison Streets, western side.
- Commencement of kerb, island and safety platform work at the intersection of Derby and Denison Streets, eastern side.


April

- Completion kerb, island and safety platform work at the intersection of Derby and Denison Streets, eastern side.

Comments

Denison Street Reconstruction

Total Adopted Budget: \$1,430,000

Scope	The works being undertaken include installation of stormwater drainage, replacement of kerb and channel, reconstruction of driveways and footpath sections, asphalt resurfacing and signage and line marking. <i>Actual Start Date: August 2024</i> <i>Estimated Completion Date: March 2025</i>			
Initial Construction Estimate	\$900,000	Estimated Cost at Completion	\$1,400,000	Budget Health 

On the Horizon – Key Milestones & Deliverables

March

- Line marking
- Reinstate concrete islands
- Install turf
- Completion

Comments

Project commenced in conjunction with Derby Street / Denison Street / Kent Street roadworks.

COMPLETED PROJECTS				
Glenmore State School				Total Adopted Budget: \$300,000
Scope	The works being undertaken at Glenmore State School include construction of footpaths and kerb ramps. Actual Start Date: December 2024 Completion Date: February 2025			
Initial Construction Estimate	\$285,000	Cost at Completion	\$298,000	Budget Health <div></div>
Comments	Project reached completion on 17 February 2025			

12 NOTICES OF MOTION

Nil

13 QUESTIONS ON NOTICE

Nil

14 URGENT BUSINESS/QUESTIONS

Urgent Business is a provision in the Agenda for members to raise questions or matters of a genuinely urgent or emergent nature, that are not a change to Council Policy and can not be delayed until the next scheduled Council or Committee Meeting.

15 CLOSURE OF MEETING